

Minitom



Small, automatic precision cut-off machine for sectioning all materialographic and ceramic specimens



The transparent protection screen allows visual examination during the cutting process without the risk of splashing

- **Simple operation**
- **Powerful motor**
- **High precision**
- **Functional design**
- **Easy to clean**

Minitom is a small, low-speed, precision cut-off machine for sectioning all types of materials. Maximum specimen size: 30 mm dia. The cutting speed is continuously variable and the motor is designed to ensure that the selected speed remains constant at any load. The required specimen size can be set with an accuracy of + 0.01 mm, by means of a micrometer screw, and the cutting pressure can be selected independent of the weight of the specimen. The motor is equipped with a thermal overload protection although prior to actually switching out an overload-indicator provides a visual warning that either the cutting procedure should be stopped or the cutting pressure should be reduced. Minitom can be adjusted to stop cutting at any stage of the operation, e.g. when the material has just been sliced through. The cutting process is liquid-cooled

with the cooling liquid draining back continuously into the coolant tank.

Operation

Minitom is very easy to operate, with fixation of the specimen and the setting of specimen size, cutting speed, and cutting pressure taking only a few minutes. The workpiece is fastened in a holder mounted on a movable arm. This arm acts as a steelyard with two weights, one of which balances the specimen holder with specimen, the other being used to set the exact cutting pressure. During the cutting operation the arm is guided down over the cut-off wheel. When the cutting operation is finished the cut-off wheel stops and the specimen falls into a basket in the coolant tank thus protecting the specimen from drying and making retrieval easy. The coolant tank is very easy to remove and both the retrieval of the finished specimens and the cleaning of the coolant tank are therefore simple and straightforward. Minitom's practical and attractive design is the product of a very extensive programme of design development.

Minitom is small, compact and extremely user-friendly




Specimen holders

Minitom can be supplied with a variety of specimen holders to suit a wide range of specimen types.

Cut-off wheels

Minitom uses CBN and diamond cut-off wheels with a diameter of 75 mm (3") to 127 mm (5") and a center hole diameter of 12.7 mm (1/2"). The cut-off wheels are available with different grain size and concentration, thus ensuring that the correct cut-off wheel is available for any type of material.

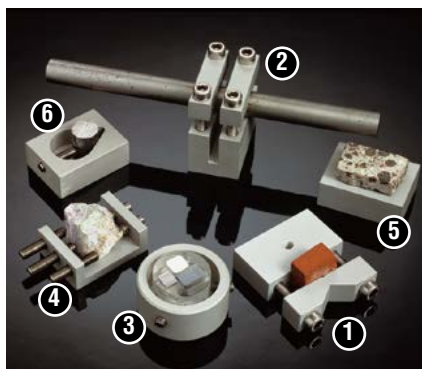

Minitom offers holders for all specimen shapes

Technical specifications

	Voltage: 100-240 V / 50-60 Hz Output: 38 W
Motor shaft	Speed: 100-420 rpm Diameter: 12.7 mm (1/2") Wheel diameter: 75-127 mm (3"-5")
Specimen holder arm	Balances specimen holder with workpieces up to 200 g in weight Weight 0-350 g, which is used to set the cutting pressure Axial movement: 0-25 mm
Coolant tank	Volume: 250 ml
Dimensions	Width: 280 mm Depth: 400 mm Height: 400 mm Weight: 8 kg

Struers' equipment is in conformity with the provisions of the applicable International Directives and their appurtenant Standards. (Please contact your local supplier for details)

Specifications

Minitom

Low-speed precision cut-off machine. Complete with universal specimen holder (04436901) and flange set 65 mm dia. as well as 42 mm dia. Cut-off wheels are ordered separately. 100-240 V / 50-60 Hz

Cat. no.

1 Specimen holders	
For general use. Vice type with max. opening 25 mm / 1".	04436901
2	
For long specimens. Double parallel vice with max. opening 25 mm / 1".	04436902
3	
For round specimens. Max. opening 30 mm dia.	04436903
4	
For irregularly-shaped specimens. With 5 screws. Max. opening 30 mm.	04436904
5	
For adhesive mounting of specimens. 30 x 40 mm.	04436905
6	
For round specimens. Teardrop type with max. opening 20 mm dia.	04436906

Struers' products are subject to constant product development. Therefore, we reserve the right to introduce changes in our products without notice.



Struers ApS
Pederstrupvej 84
DK-2750 Ballerup, Denmark
Phone +45 44 600 800
Fax +45 44 600 801
struers@struers.dk
www.struers.com

AUSTRALIA & NEW ZEALAND
Struers Australia
27 Mayneview Street
Milton QLD 4064
Australia
Phone +61 7 3512 9600
Fax +61 7 3369 8200
info.au@struers.dk

BELGIQUE (Wallonie)
Struers S.A.S.
370, rue du Marché Rollay
F- 94507 Champigny
sur Marne Cedex
Téléphone +33 1 5509 1430
Télécopie +33 1 5509 1449
struers@struers.fr

BELGIUM (Flanders)
Struers GmbH Nederland
Elektraweg 5
3144 CB Maassluis
Telefoon +31 (0) 599 7209
Fax +31 (0) 5997201
netherlands@struers.de

CANADA
Struers Ltd.
7275 West Credit Avenue
Mississauga, Ontario L5N 5M9
Phone +1 905-814-8855
Fax +1 905-814-1440
info@struers.com

CHINA
Struers Ltd.
No. 1696 Zhang Heng Road
Zhang Jiang Hi-Tech Park
Shanghai 201203, P.R. China
Phone +86 (21) 6035 3900
Fax +86 (21) 6035 3999
struers@struers.cn

CZECH REPUBLIC & SLOVAKIA
Struers GmbH Organizační složka
všeckotechnický park
Přílepská 1920,
CZ-252 63 Roztoky u Prahy
Phone +420 233 312 625
Fax +420 233 312 640
czechrepublic@struers.de
slovakia@struers.de

DEUTSCHLAND
Struers GmbH
Carl-Friedrich-Benz-Straße 5
D-47877 Willich
Telefon +49 (0) 2154 486-0
Fax +49 (0) 2154 486-222
verkauf@struers.de

FRANCE
Struers S.A.S.
370, rue du Marché Rollay
F-94507 Champigny
sur Marne Cedex
Téléphone +33 1 5509 1430
Télécopie +33 1 5509 1449
struers@struers.fr

HUNGARY
Struers GmbH
Magyarország Fióktelep
Tatai ut 53
2821 Gyermely
Phone +36 (34) 880546
Fax +36 (34) 880547
hungary@struers.de

IRELAND
Struers Ltd.
Unit 11 Evolution @ AMP
Whittle Way, Catcliffe
Rotherham S60 5BL
Tel. +44 0845 604 6664
Fax +44 0845 604 6651
info@struers.co.uk

ITALY
Struers Italia
Via Monte Grappa 80/4
20020 Arese (MI)
Tel. +39-02/38236281
Fax +39-02/38236274
struers.it@struers.it

JAPAN
Marumoto Struers K.K.
Takara 3rd Building
18-6, Higashi Ueno 1-chome
Taito-ku, Tokyo 110-0015
Phone +81 3 5688 2914
Fax +81 3 5688 2927
struers@struers.jp

NETHERLANDS
Struers GmbH Nederland
Zomerdijk 34 A
3143 CT Maassluis
Telefoon +31 (0) 599 7209
Fax +31 (0) 5997201
netherlands@struers.de

NORWAY
Struers ApS, Norge
Sjøs kogevneien 44C
1407 Vinterbro
Telefon +47 970 94 285
info@struers.no

ÖSTERREICH
Struers GmbH
Zweigniederlassung Österreich
Betriebsgebiet Puch Nord 8
5412 Puch
Telefon +43 6245 70567
Fax +43 6245 70567-78
austria@struers.de

POLAND
Struers Sp. z o.o.
Oddział w Polsce
ul. Jasnogórska 44
31-358 Kraków
Phone +48 12 661 20 60
Fax +48 12 626 01 46
poland@struers.de

ROMANIA
Struers GmbH
Sucursala Sibiu
Str.Școala de Inot, nr. 18
RO-550005 Sibiu
Phone +40 269 244 558
Fax +40 269 244 559
romania@struers.de

SCHWEIZ
Struers GmbH
Zweigniederlassung Schweiz
Weissenbrunnstraße 41
CH-8903 Birrmenndorf
Telefon +41 44 777 63 07
Fax +41 44 777 63 09
switzerland@struers.de

SINGAPORE
Struers Singapore
627A Aljunied Road,
#07-08 BizTech Centre
Singapore 389842
Phone +65 6299 2268
Fax +65 6299 2661
struers.sg@struers.dk

SPAIN
Struers España
Camino Cerro de los Gamos 1
Building 1 - Pozuelo de Alarcón
CP 28224 Madrid
Teléfono +34 917 901 204
Fax +34 917 901 112
struers.es@struers.es

SUOMI
Struers ApS, Suomi
Hietalahdenranta 13
00180 Helsinki
Puhelin +358 (0)207 919 430
Faksi +358 (0)207 919 431
finland@struers.fi

SWEDEN
Struers Sverige
Ekbacksvägen 22
168 69 Bromma
Telefon +46 (0)8 447 53 90
Telefax +46 (0)8 447 53 99
info@struers.se

UNITED KINGDOM
Struers Ltd.
Unit 11 Evolution @ AMP
Whittle Way, Catcliffe
Rotherham S60 5BL
Tel. +44 0845 604 6664
Fax +44 0845 604 6651
info@struers.co.uk

USA
Struers Inc.
24766 Detroit Road
Westlake, OH 44145-1598
Phone +1 440 871 0071
Fax +1 440 871 8188
info@struers.com